




RUBBER-MOUNTED FRAMED GLASS

SINGLE
SLIDING WINDOW

FS-110

EXTERIOR VIEW

R. H. SHOWN - L. H. OPPOSITE

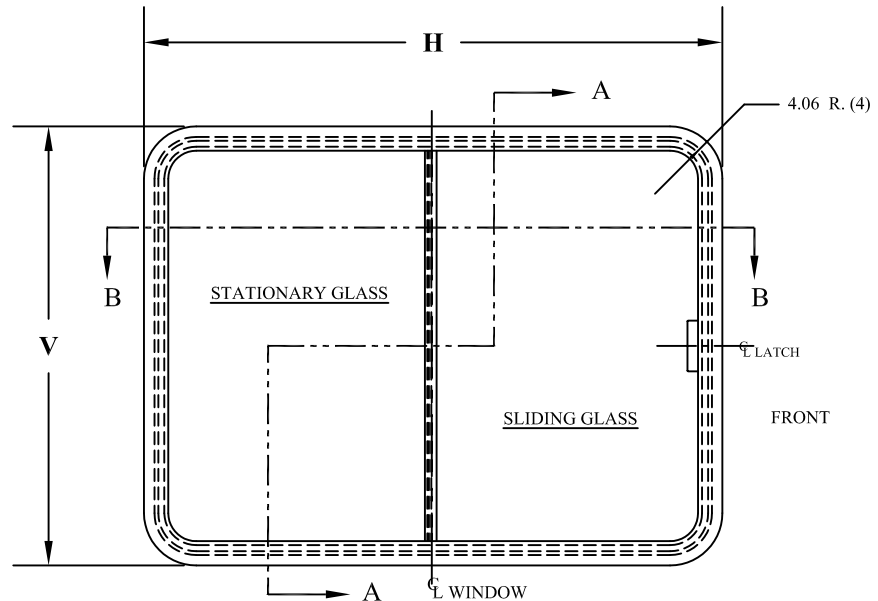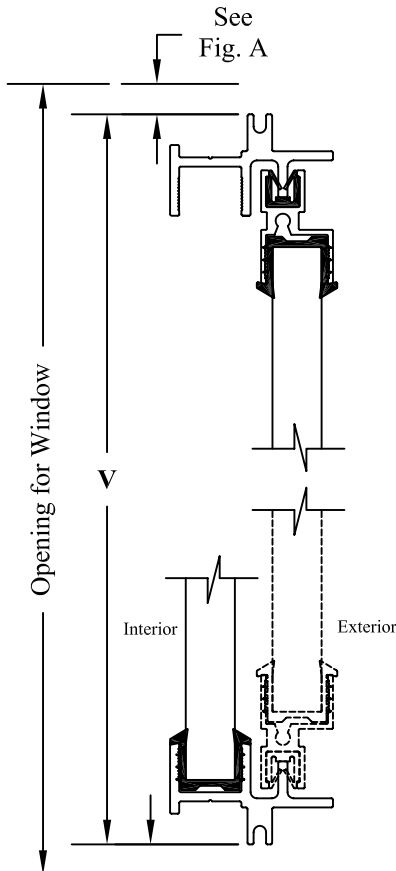

SECTION A-A


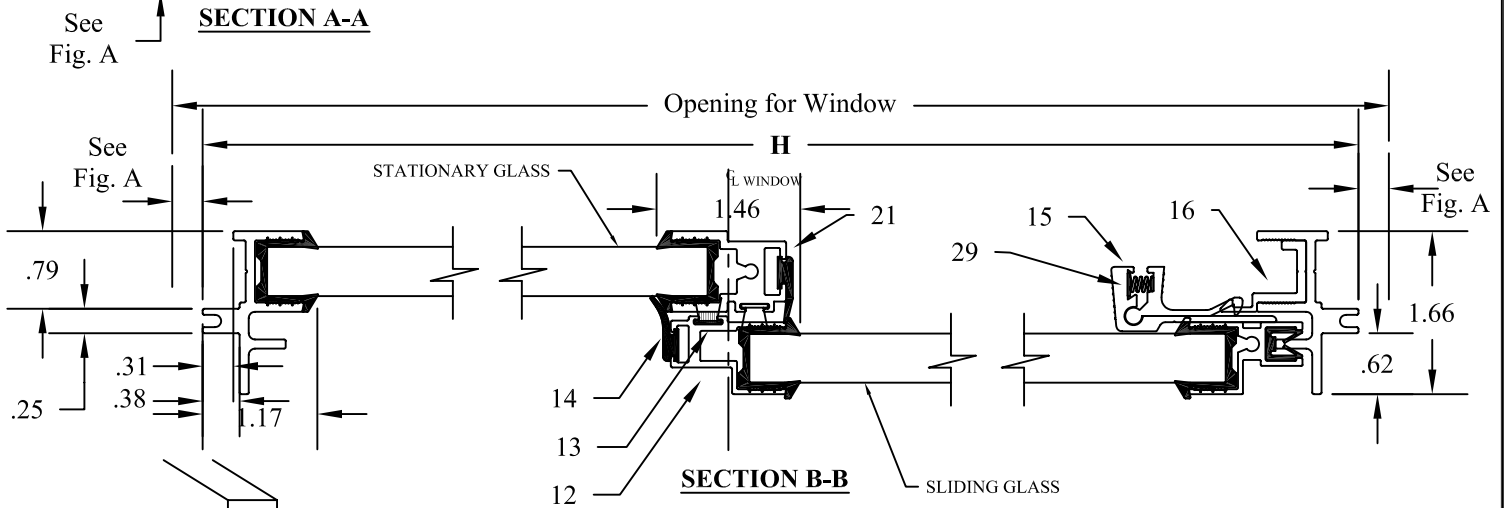


FIG. A
WINDOW OPENING CLEARANCES

KEY TO NUMBERED PARTS

1. Sliding glass
2. Vinyl glass channel
3. Sliding glass frame-sash rail
4. Felt slide channel
5. Outer Frame
6. Vehicle Wall
7. Stationary glass
8. Installation gasket (H Type)
12. Vertical Sash Rail
13. Felt pile Weather seal
14. Rubber Weather seal
15. WP-2 Combination Latch & Handle
16. Latch Keeper
21. Vert. End Rail-Stationary

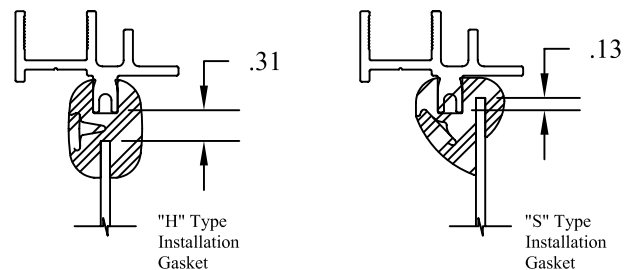

Recommended clearance between window assembly and body opening. Clearances will vary from supplier to supplier. These types of installation gaskets, with clearances shown, can be supplied with windows upon request.

Framed single sliding window designed to accept insulated glass or other 1/2" thick glazing. Movable glass is mounted in a separate aluminum frame which slides within the outer frame. Drain holes, where necessary, and weather seals keep wind and water outside. This window is manufactured in various shapes and sizes.

ORDERING INFORMATION

STANDARD GLAZING: 1/2" Insulated Clear Tempered Safety Glass, consisting of 1/8" Glass, 1/4" gap, and 1/8" Glass

Options:

Light Green or Medium Gray Tint*
Other 1/2" thick glazings available

FRAME FINISH: Flex Black (STD)

CORNER RADIUS: 4.06" (STD)

Options: 2.69"

LATCH: WP2 Squeeze Latch (STD)

EXTERIOR VIEW

R. H. SHOWN - L. H. OPPOSITE

